


BLASTHOLE BIT SUB

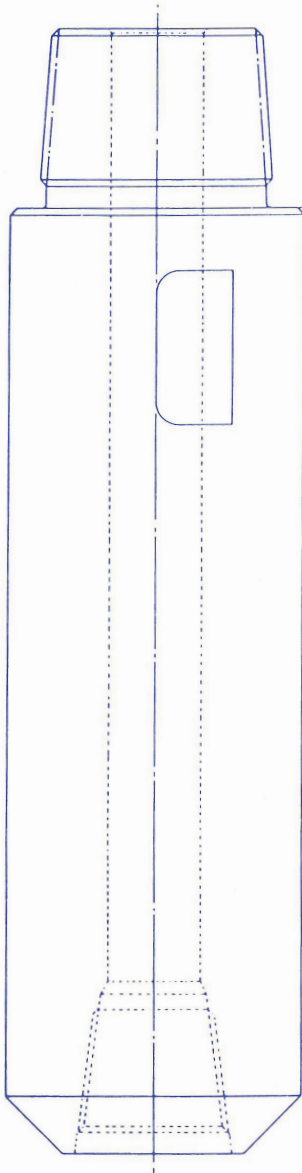

Bit subs with no ribs or rollers are used in some cases where extended bit life and penetration can be achieved by not packing the hole bottom above the bit.

ALL DIMENSIONS IN INCHES

Nominal Body Diam.	Length S/S	Width of Wrench Slot	Recommended Pin Connections	Recommended Box Connections
5 1/2	26	5	4 1/2 Reg	4 1/2 Reg
6 5/8	33 1/2	5	4 1/2 Beco	4 1/2 Reg
7 5/8	33 1/2	5	6 Beco	4 1/2 Reg
8 5/8	33 1/2	5	6 Beco	6 5/8 Reg
10 3/4	33 1/2	6 3/4	8 Beco	6 5/8 Reg
12 3/4	33 1/2	6 3/4	8 Beco	6 5/8 Reg
13 3/8	33 1/2	6 3/4	10 Beco	7 5/8 Reg
15	39 1/2	6 3/4	12 Beco	7 5/8 Reg

When ordering, please specify:

1. Nominal size (diameter).
2. Pipe size.
3. Connections and wrench flats.