


## BLASTHOLE FIXED RIB STABILIZER

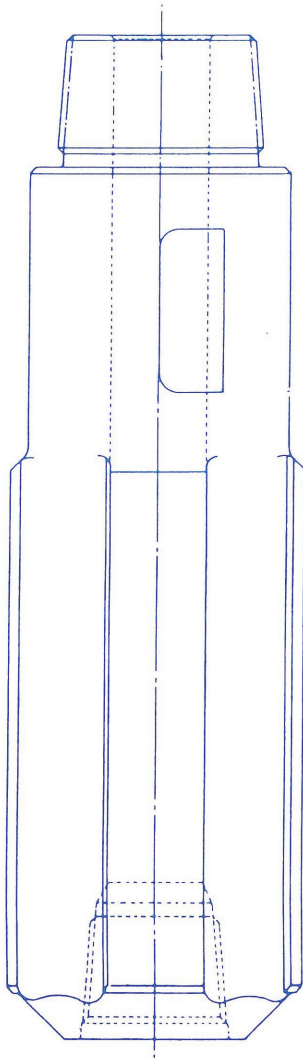

GALLEON fixed rib stabilizer ensures that the drill bit runs concentrically about its axis and thereby optimizes bit life and penetration rates.

Stabilizers can be supplied with tungsten particle or tungsten insert wear protection over the ribs according to customer preferences. Stabilizers are available in straight ribs and spiral.

### ALL DIMENSIONS IN INCHES

Nominal ( Hole) Size	Length S/S	Body Diam.	Width of Wrench Slot	Approx. Weight Lbs.	Recommended Pin Connections	Recommended Box Connections
7 <sup>7</sup> / <sub>8</sub>	33 <sup>1</sup> / <sub>2</sub>	6 <sup>5</sup> / <sub>8</sub>	5	185	4 <sup>1</sup> / <sub>2</sub> Reg.	4 <sup>1</sup> / <sub>2</sub> Reg.
9	33 <sup>1</sup> / <sub>2</sub>	7 <sup>5</sup> / <sub>8</sub>	5	400	6 Beco	4 <sup>1</sup> / <sub>2</sub> Reg.
9 <sup>7</sup> / <sub>8</sub>	33 <sup>1</sup> / <sub>2</sub>	8 <sup>5</sup> / <sub>8</sub>	5	560	6 Beco	6 <sup>5</sup> / <sub>8</sub> Reg.
12 <sup>1</sup> / <sub>4</sub>	36	10 <sup>3</sup> / <sub>4</sub>	6 <sup>3</sup> / <sub>4</sub>	880	8 Beco	6 <sup>5</sup> / <sub>8</sub> Reg.
15	36	13 <sup>3</sup> / <sub>8</sub>	6 <sup>3</sup> / <sub>4</sub>	1500	10 Beco	7 <sup>5</sup> / <sub>8</sub> Reg.
17 <sup>1</sup> / <sub>2</sub>	36	15	6 <sup>3</sup> / <sub>4</sub>	2000	12 Beco	7 <sup>5</sup> / <sub>8</sub> Reg.

**When ordering or requesting a quotation please specify:**

1. Hole diameter.
2. Size and type of wrench flats and connections if other than standard.
3. Type of wear protection: Tungsten particles or Tungsten inserts.